


ITEM TECHNICAL CARD



diámetro vite	M6
E (mm)	0,45
G (mm)	6,0
tipo	DGQFF956A
A (mm)	13,2
C (mm)	8,3
B (mm)	12,8
s - spessore lamiera (mm)	0,7 - 1,6
D (mm)	7,7
foro lamiera (mm)	9,5x9,5
F (mm)	13,3

DESCRIZIONE \ DESCRIPTION:				CATEGORIA \ CATEGORY:		0761500.00500							
DadoFE Gab.FE ss0,7-1,6 a.9,5x9,5(956A) M6													
MATERIAL \ MATERIAL:		TRATTAMENTO TERMICO \ HEAT TREATMENT:				NOTE \ NOTES:							
ESEGUITO DA \ DRAWN BY: RIVIT		DATA:						TRATT. SUPERFICIALE\ SURF. TREATMENT:		Rugosità superficiale generale: General surface roughness:			
CONTROLLATO DA \ CHECKED BY: RIVIT		DATA:		PROFONDITÀ TRATTAMENTO TERMICO (SURF) [mm]: HEAT TREATMENT (SURF) DEPTH [mm]:		NON SCALARE IL DISEGNO DO NOT RESIZE THE DRAW							
APPROVATO DA \ APPROVED BY: RIVIT		DATA:		DUREZZA \ HARDNESS:		FOGLIO\ SHEET: 1 OF 1		FORMATO FOGLIO: SHEET FORMAT: A4		METODO 1 (ISO 128) METHOD 1 (ISO 128)		REVISIONE: REVISION:	
				PESO \ WEIGHT:		Scale \ SCALE:		CARTIGLIO \ FORMAT Mod.P023_07					

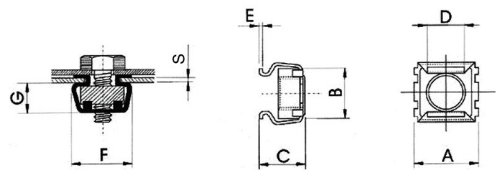

FASTENERS
& TOOLS



RIVIT.IT